


# SECURA KEY RADIO KEY® 600/600e

## Higher Security/Extreme Weather Installation (Installation with RKAR Auxiliary Reader)

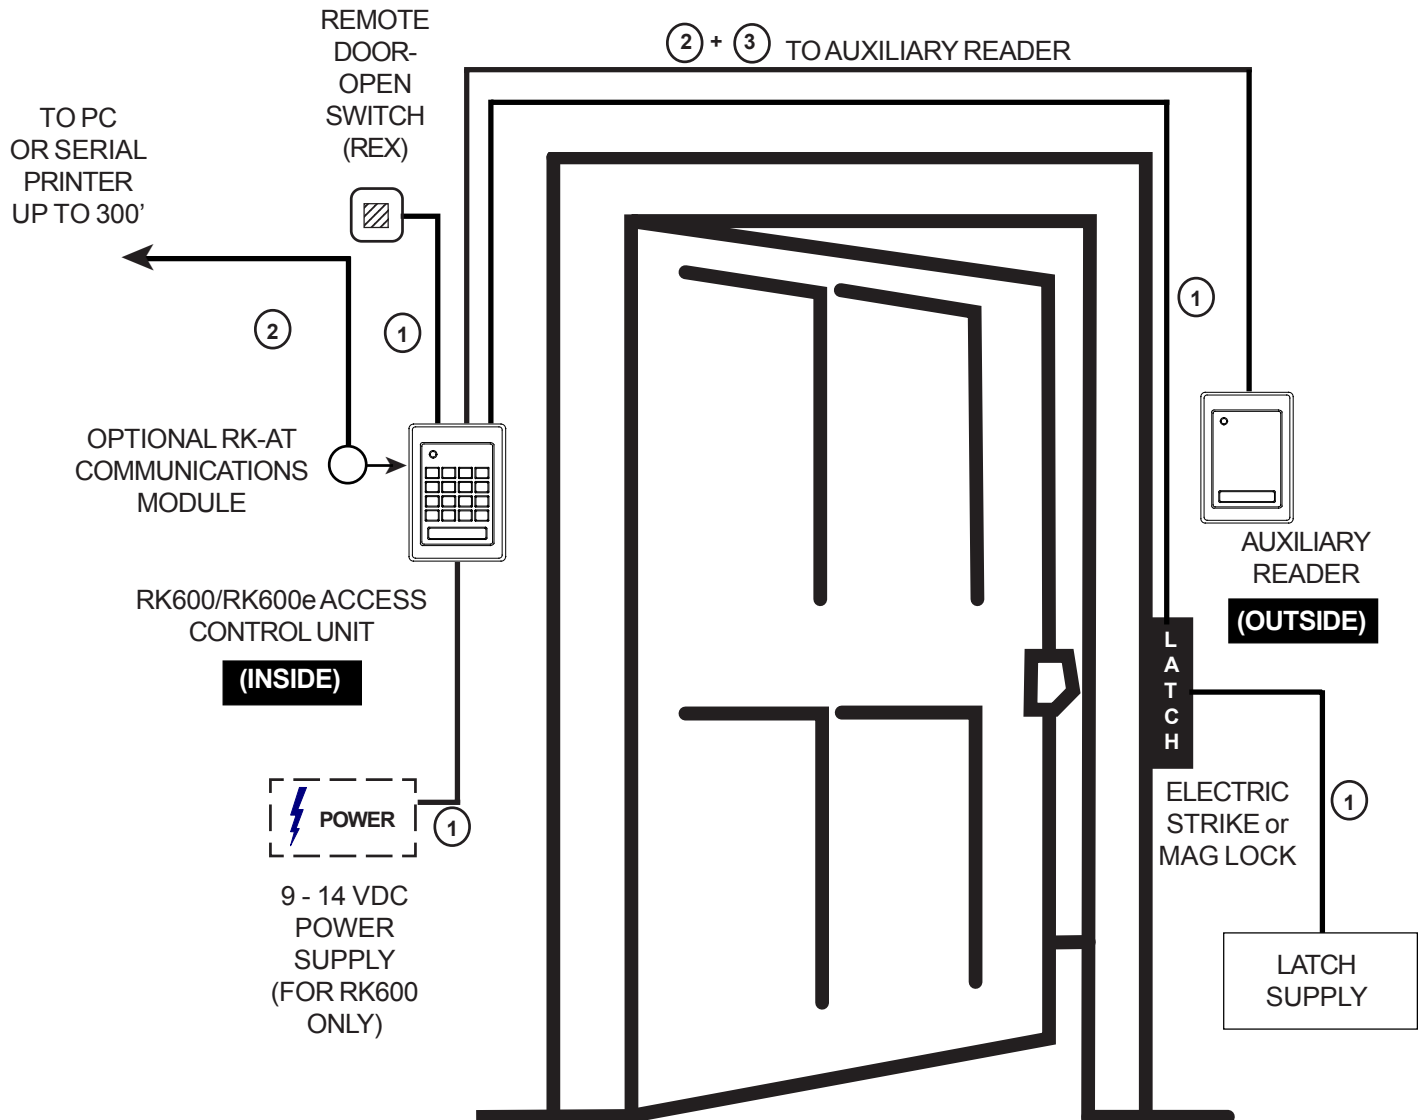


- CABLE TYPES:**
- ① 2 COND, UNSHIELDED 18-22 AWG
  - ② 4 COND, SHIELDED 22-24 AWG
  - ③ 2 COND, UNSHIELDED 22 AWG

**POWER REQUIREMENTS:** 9-14VDC@150ma

Product Name	Part#	Description
Radio Key 600 Access Unit	RK600	Stand Alone Prox Access Unit w/ Programming Keypad
Radio Key 600e Access Unit	RK600e	Stand Alone Prox Access Unit-Program with Card Deck
DC Power Supply	RK600-PS	9VDC Plug-In Power Supply
Auxiliary Reader	RKAR	Weather/Tamper-Resistant Reader for RK600
Audit Trail/Comm Module	RKAT	Plug-In Interface with RK-LINK™ Software
Key Tags (Black)	RKKT-01	Molded Plastic Key ring tag
Molded Card (White)	RKCM-01	Molded Plastic Card- durable, best read range
ISO Image-able Card (White)	RKCI-01	ISO-Standard thin card, use with dye sublimation printers
Latch	*	Strike/Magnetic Lock
Latch Supply	*	Supply for Strike/Magnetic Lock
Remote Open Switch	*	N.O. Pushbutton or relay contact from Exit PIR
		* - Supplied by others

# SECURA KEY RADIO KEY® 600/600e Typical Door Installation

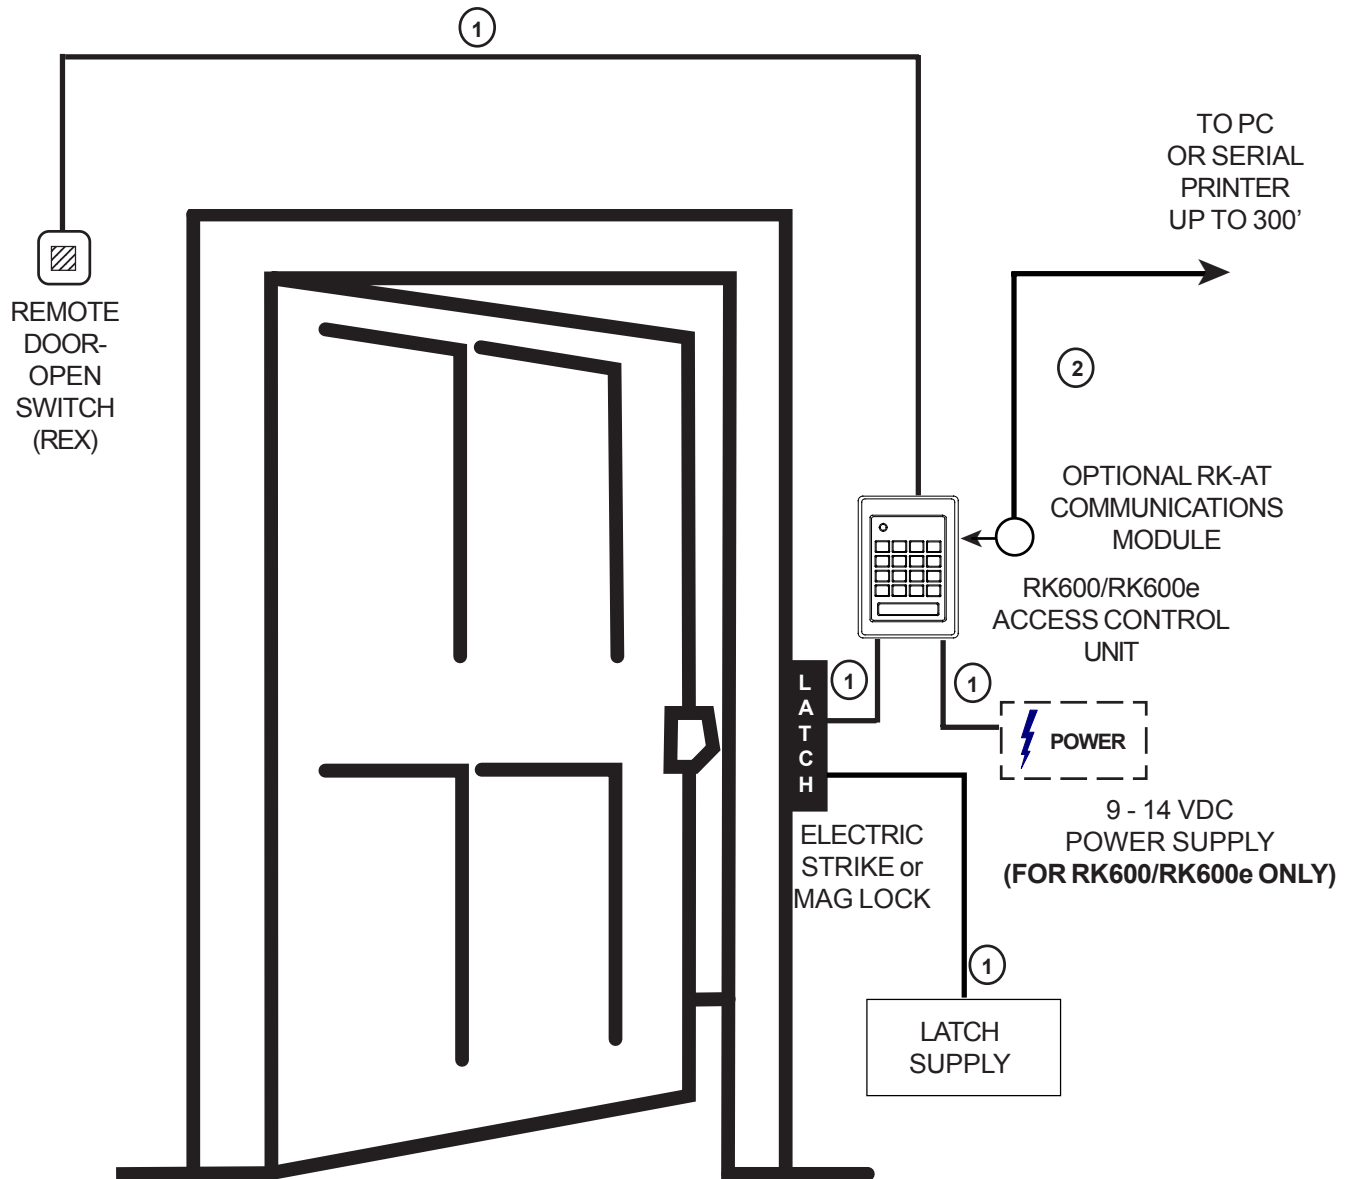

**CABLE TYPE:**

① 2 COND, UNSHIELDED 18-22 AWG

② 4 COND, SHIELDED 22-24 AWG

**POWER REQUIREMENTS:**

9-14VDC@150ma

**Secura Key**  
A Division of SOUNDCRAFT Inc.

20447 Nordhoff St.  
Chatsworth, CA 91311  
phone 818-882-0020 fax 818-882-7052  
E-mail: mail@securakey.com  
Web site: www.securakey.com